



TOPLEX
— GROUP OF COMPANY —



aw
some
Creating

DIGITAL WALL TILES

300x600mm



A B O U T
U S

TOPLEX is an ultra-modern wall tile manufacturer located at Morbi, Gujarat. **TOPLEX** is currently manufacturing wall tiles having vivid sizes.

Our vision is to provide our quality product all across the globe. We are planning to create every type of wall tiles with distinct textures, design, and colors. **TOPLEX** have united the toughness of Wall tiles with modern technology and customer aspirations to produce a range that is vast in choice. The motto is to be the best and to achieve the highest parameters of excellence.

feel

E L E
G A N T

300x600MM
DIGITAL WALL TILES



The material vibrates with light on the surface, transmitting a bewitchingly tactile, sensation of enveloping, protective warmth. This product brings together the sophisticated roots of craft tradition, adapting them to the needs of the contemporary home.

resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION



ELE-10001




ELE-10002



ELE-10003

DIGITAL 300X
WALL TILES 600mm

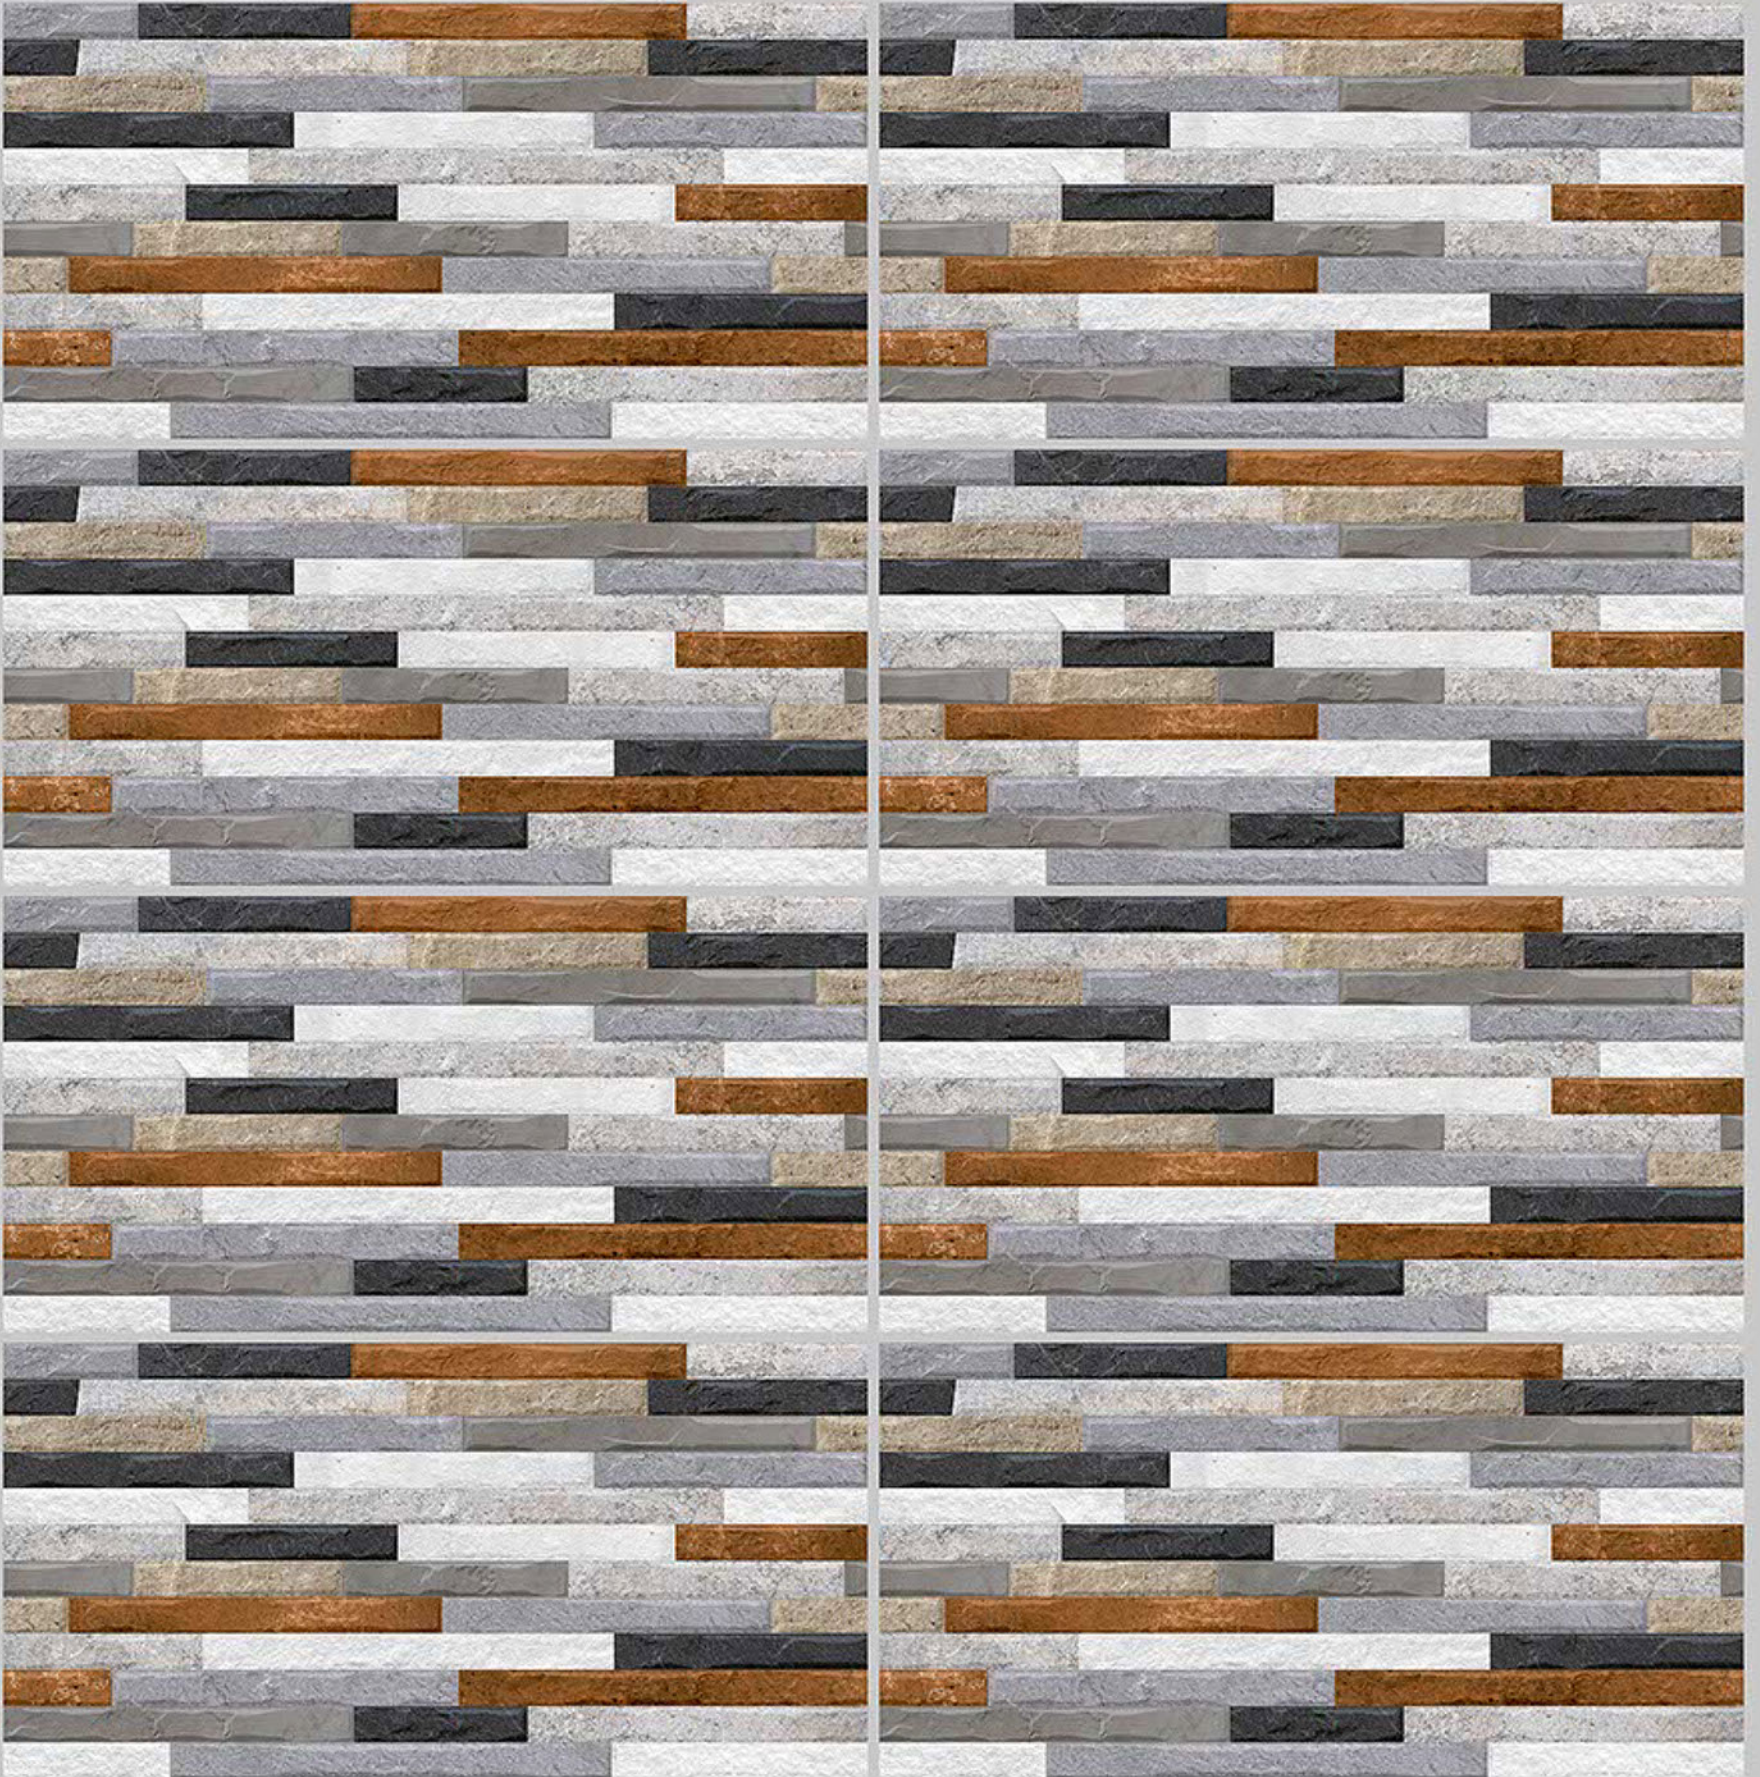

Tile Shown
ELE-10001



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION



ELE-10004




ELE-10005



ELE-10006

DIGITAL 300X
WALL TILES 600mm

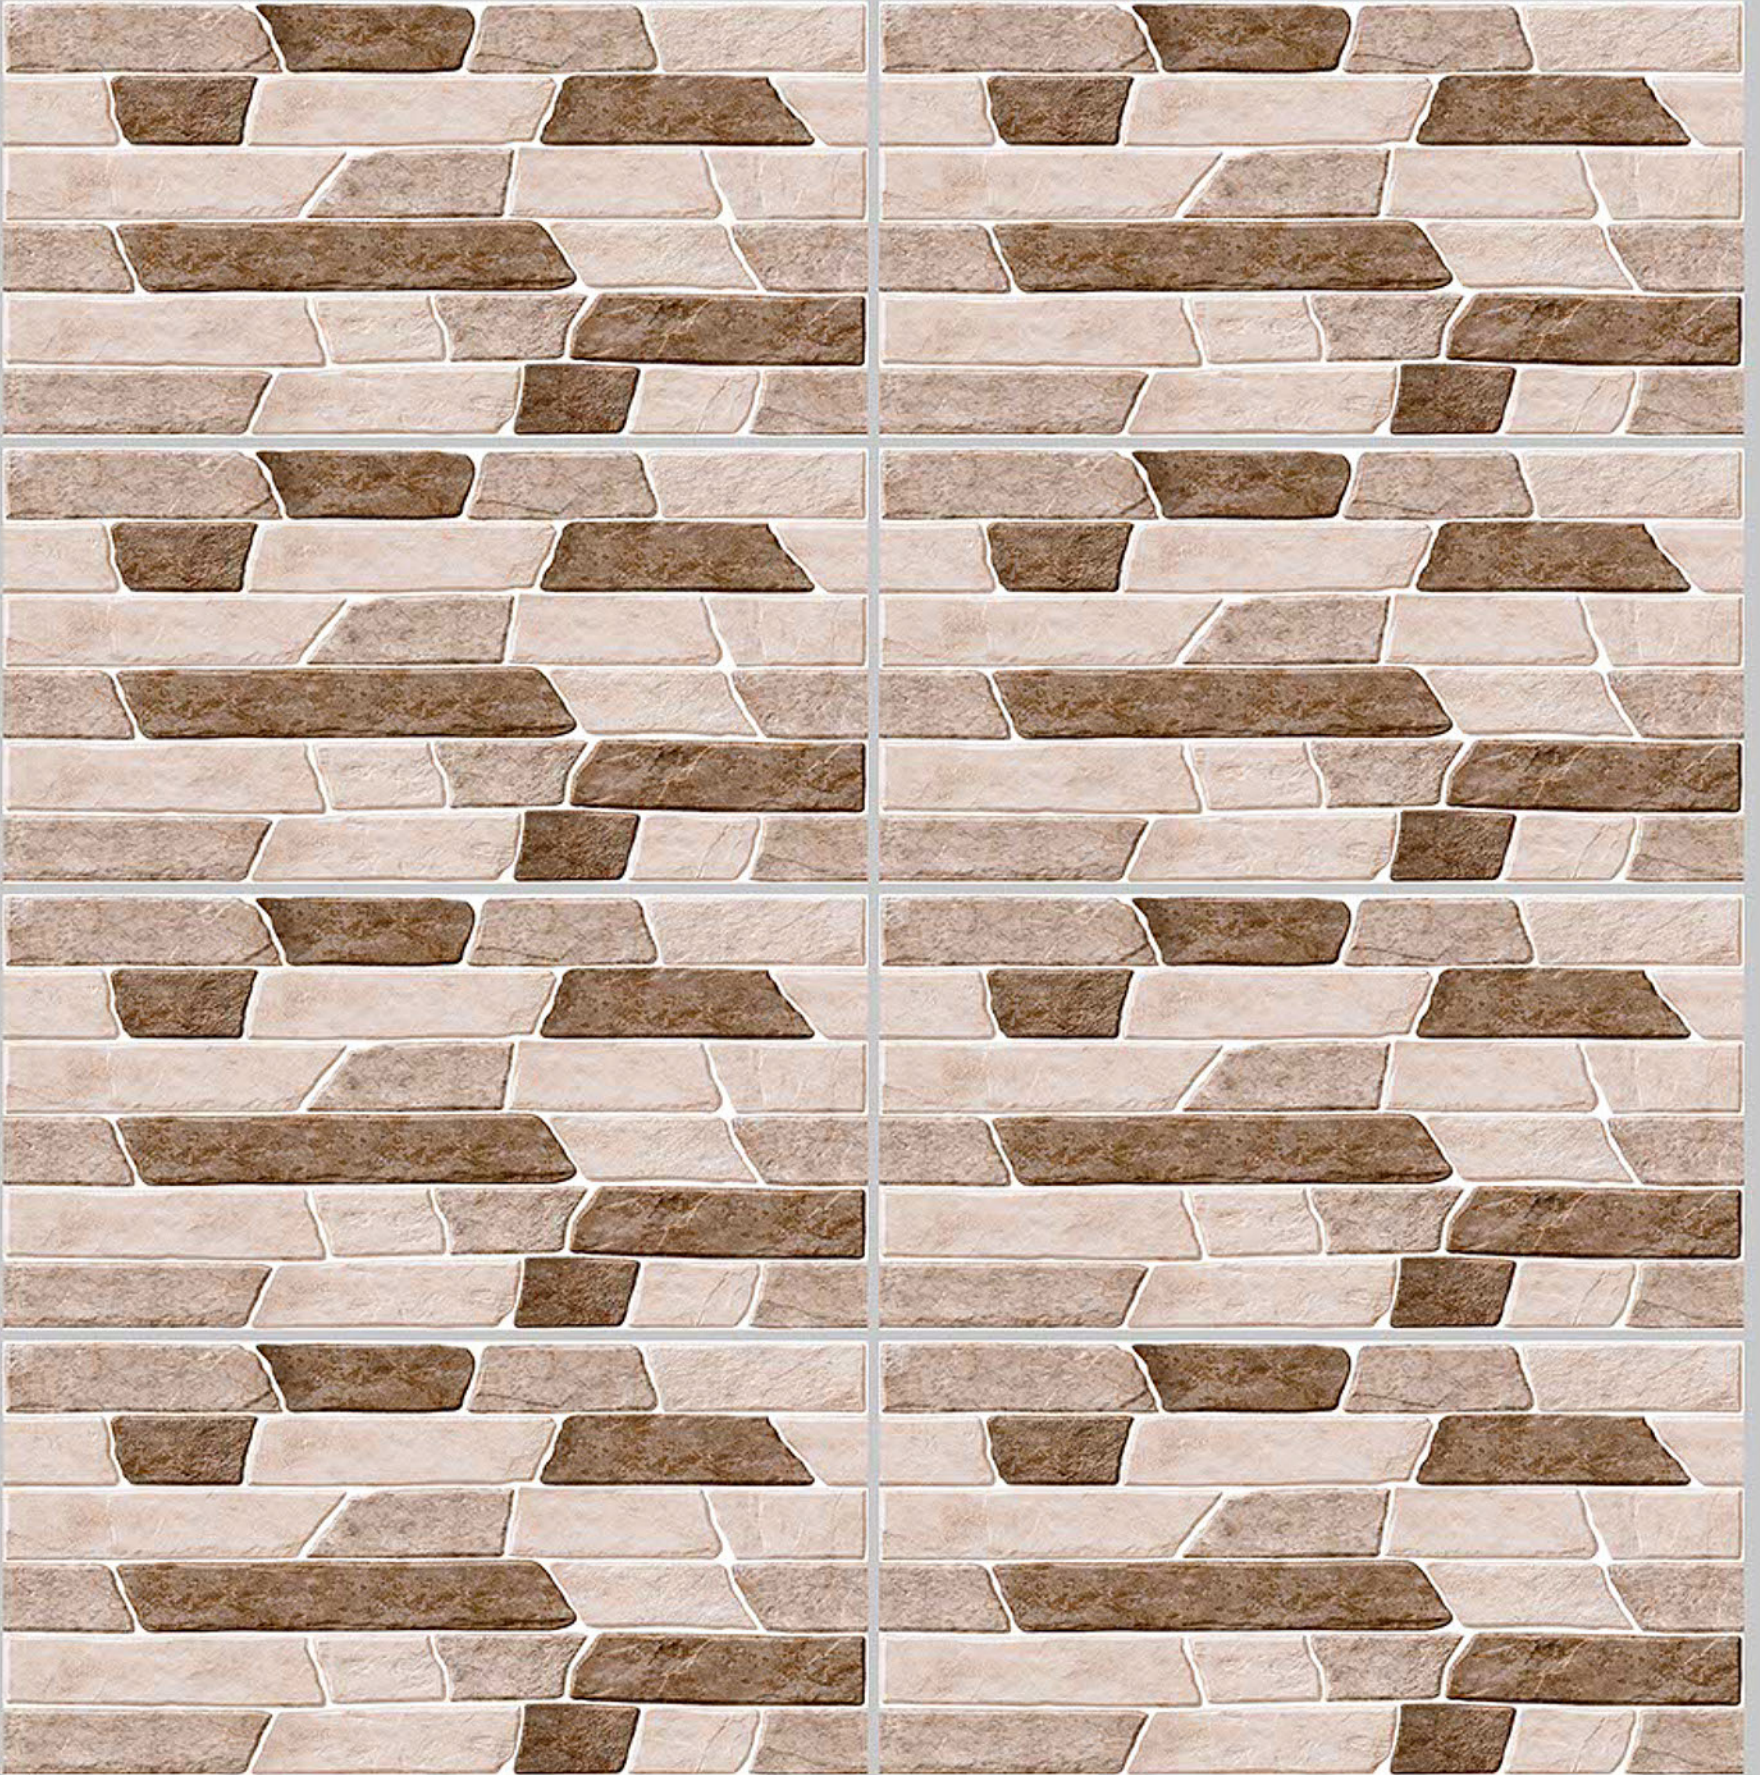


Tile Shown
ELE-10005



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION

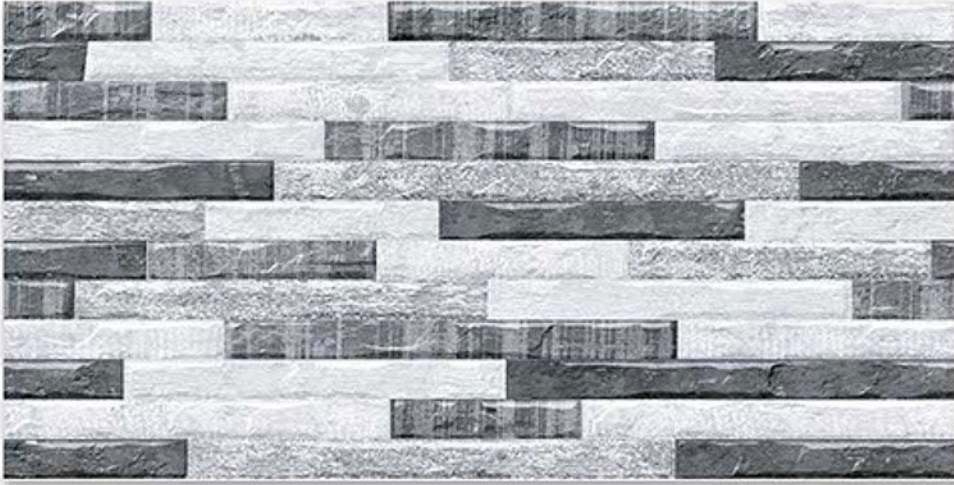

ELE-10007




ELE-10008



ELE-10009

DIGITAL 300X
WALL TILES 600mm

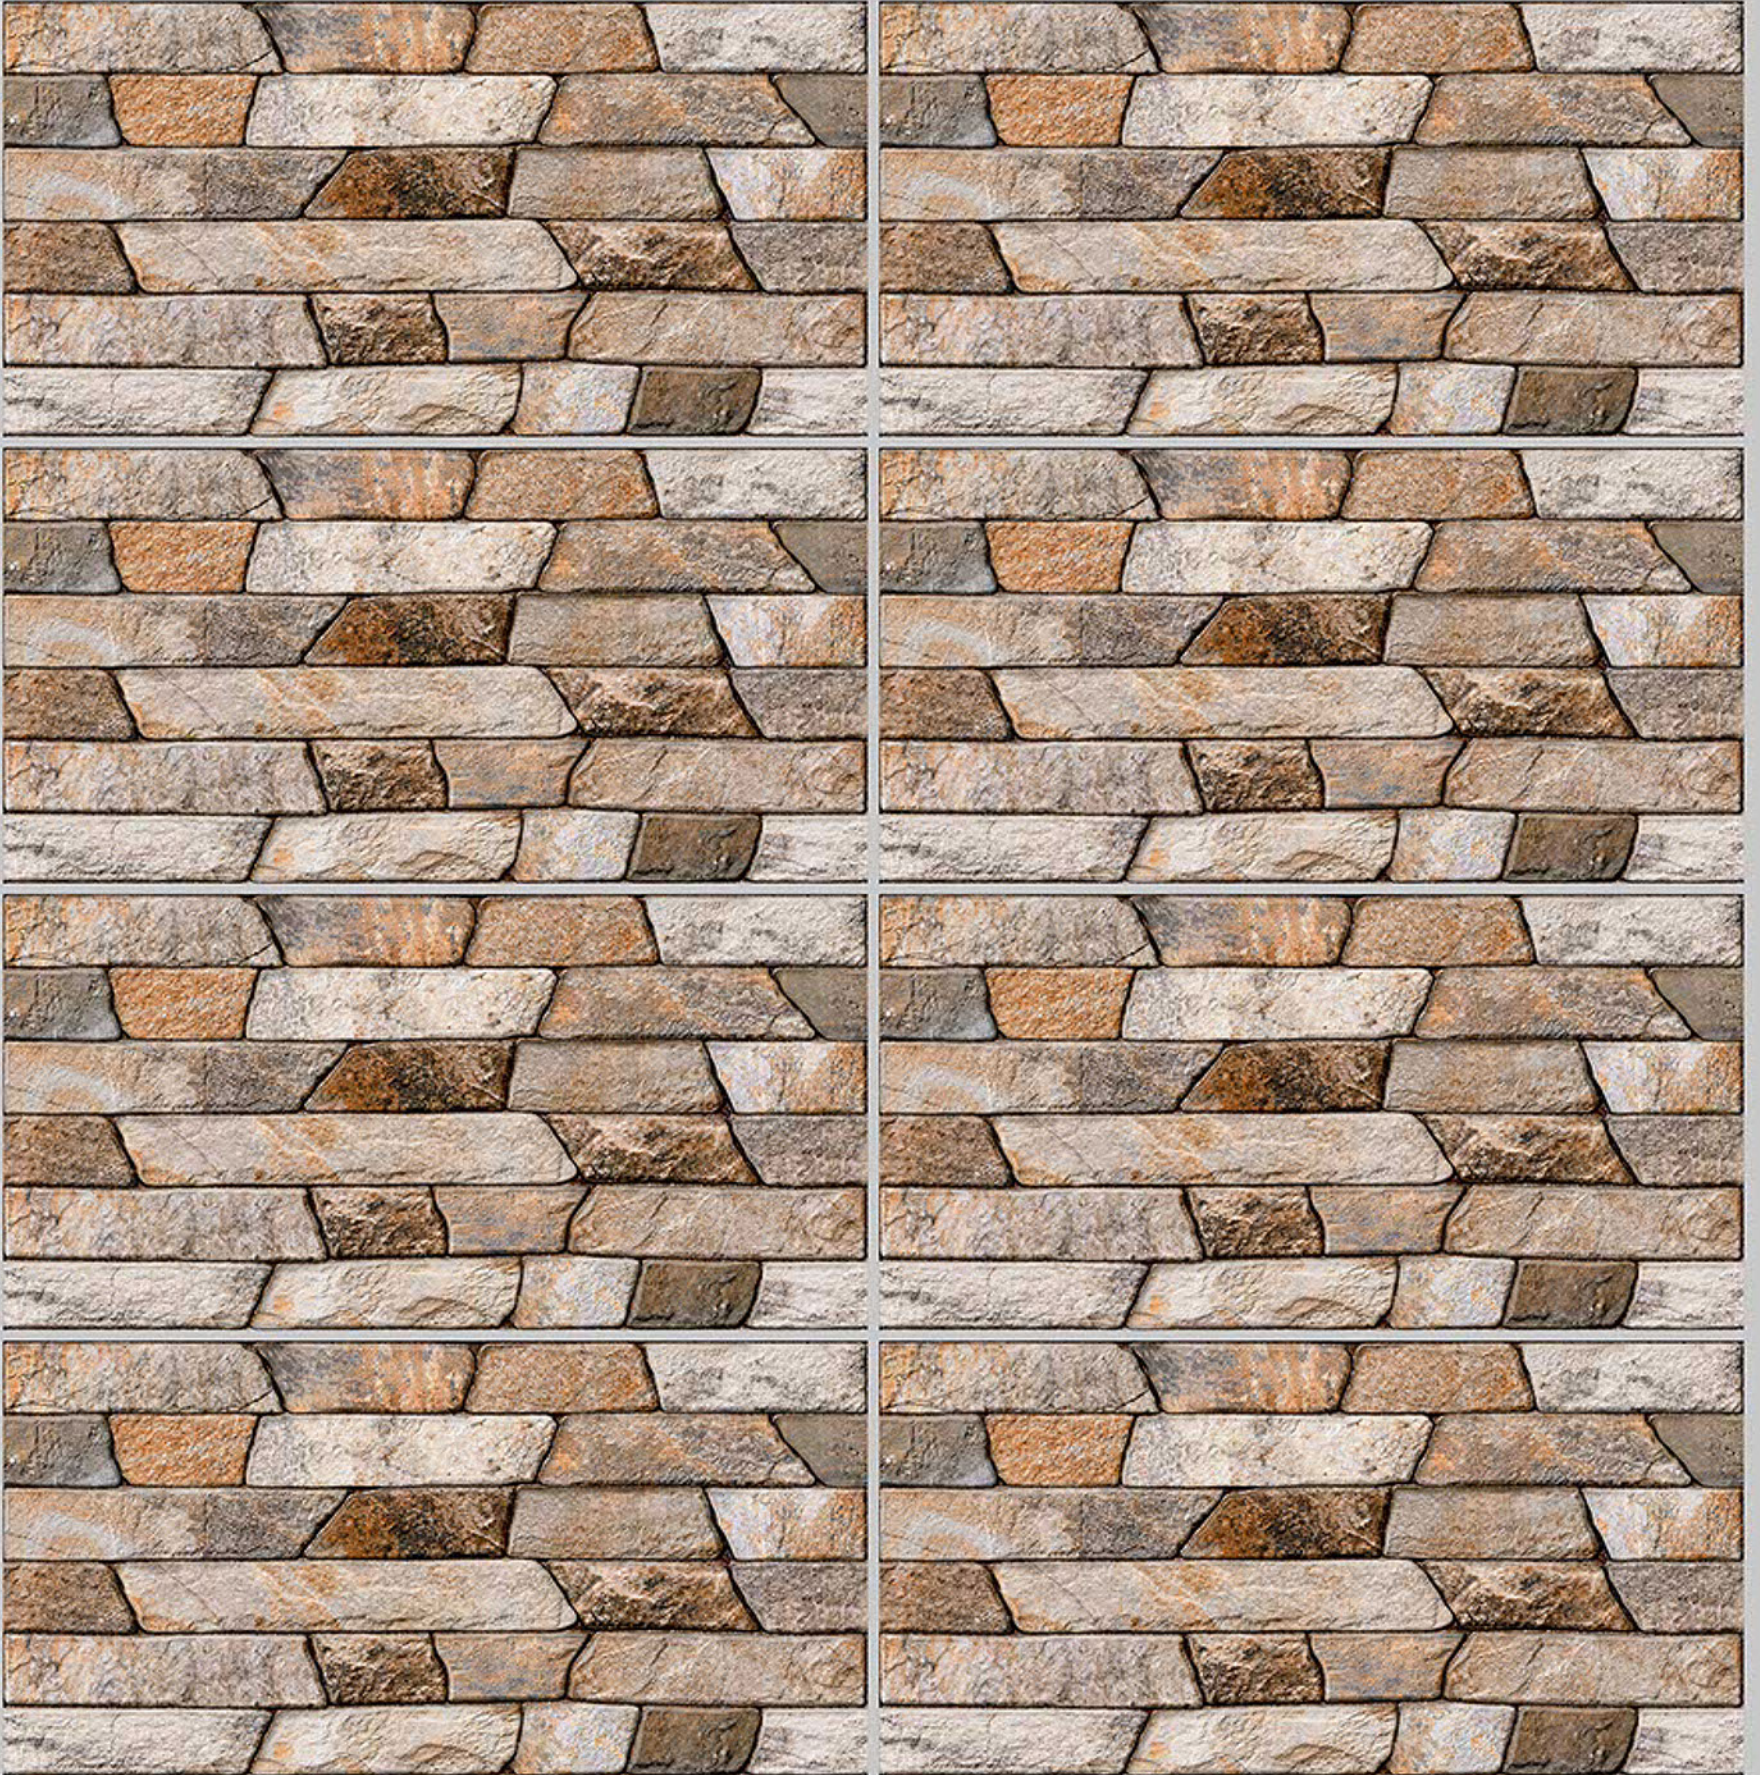

Tile Shown
ELE-10009



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION



ELE-10010




ELE-10011



ELE-10012

DIGITAL 300X
WALL TILES 600mm

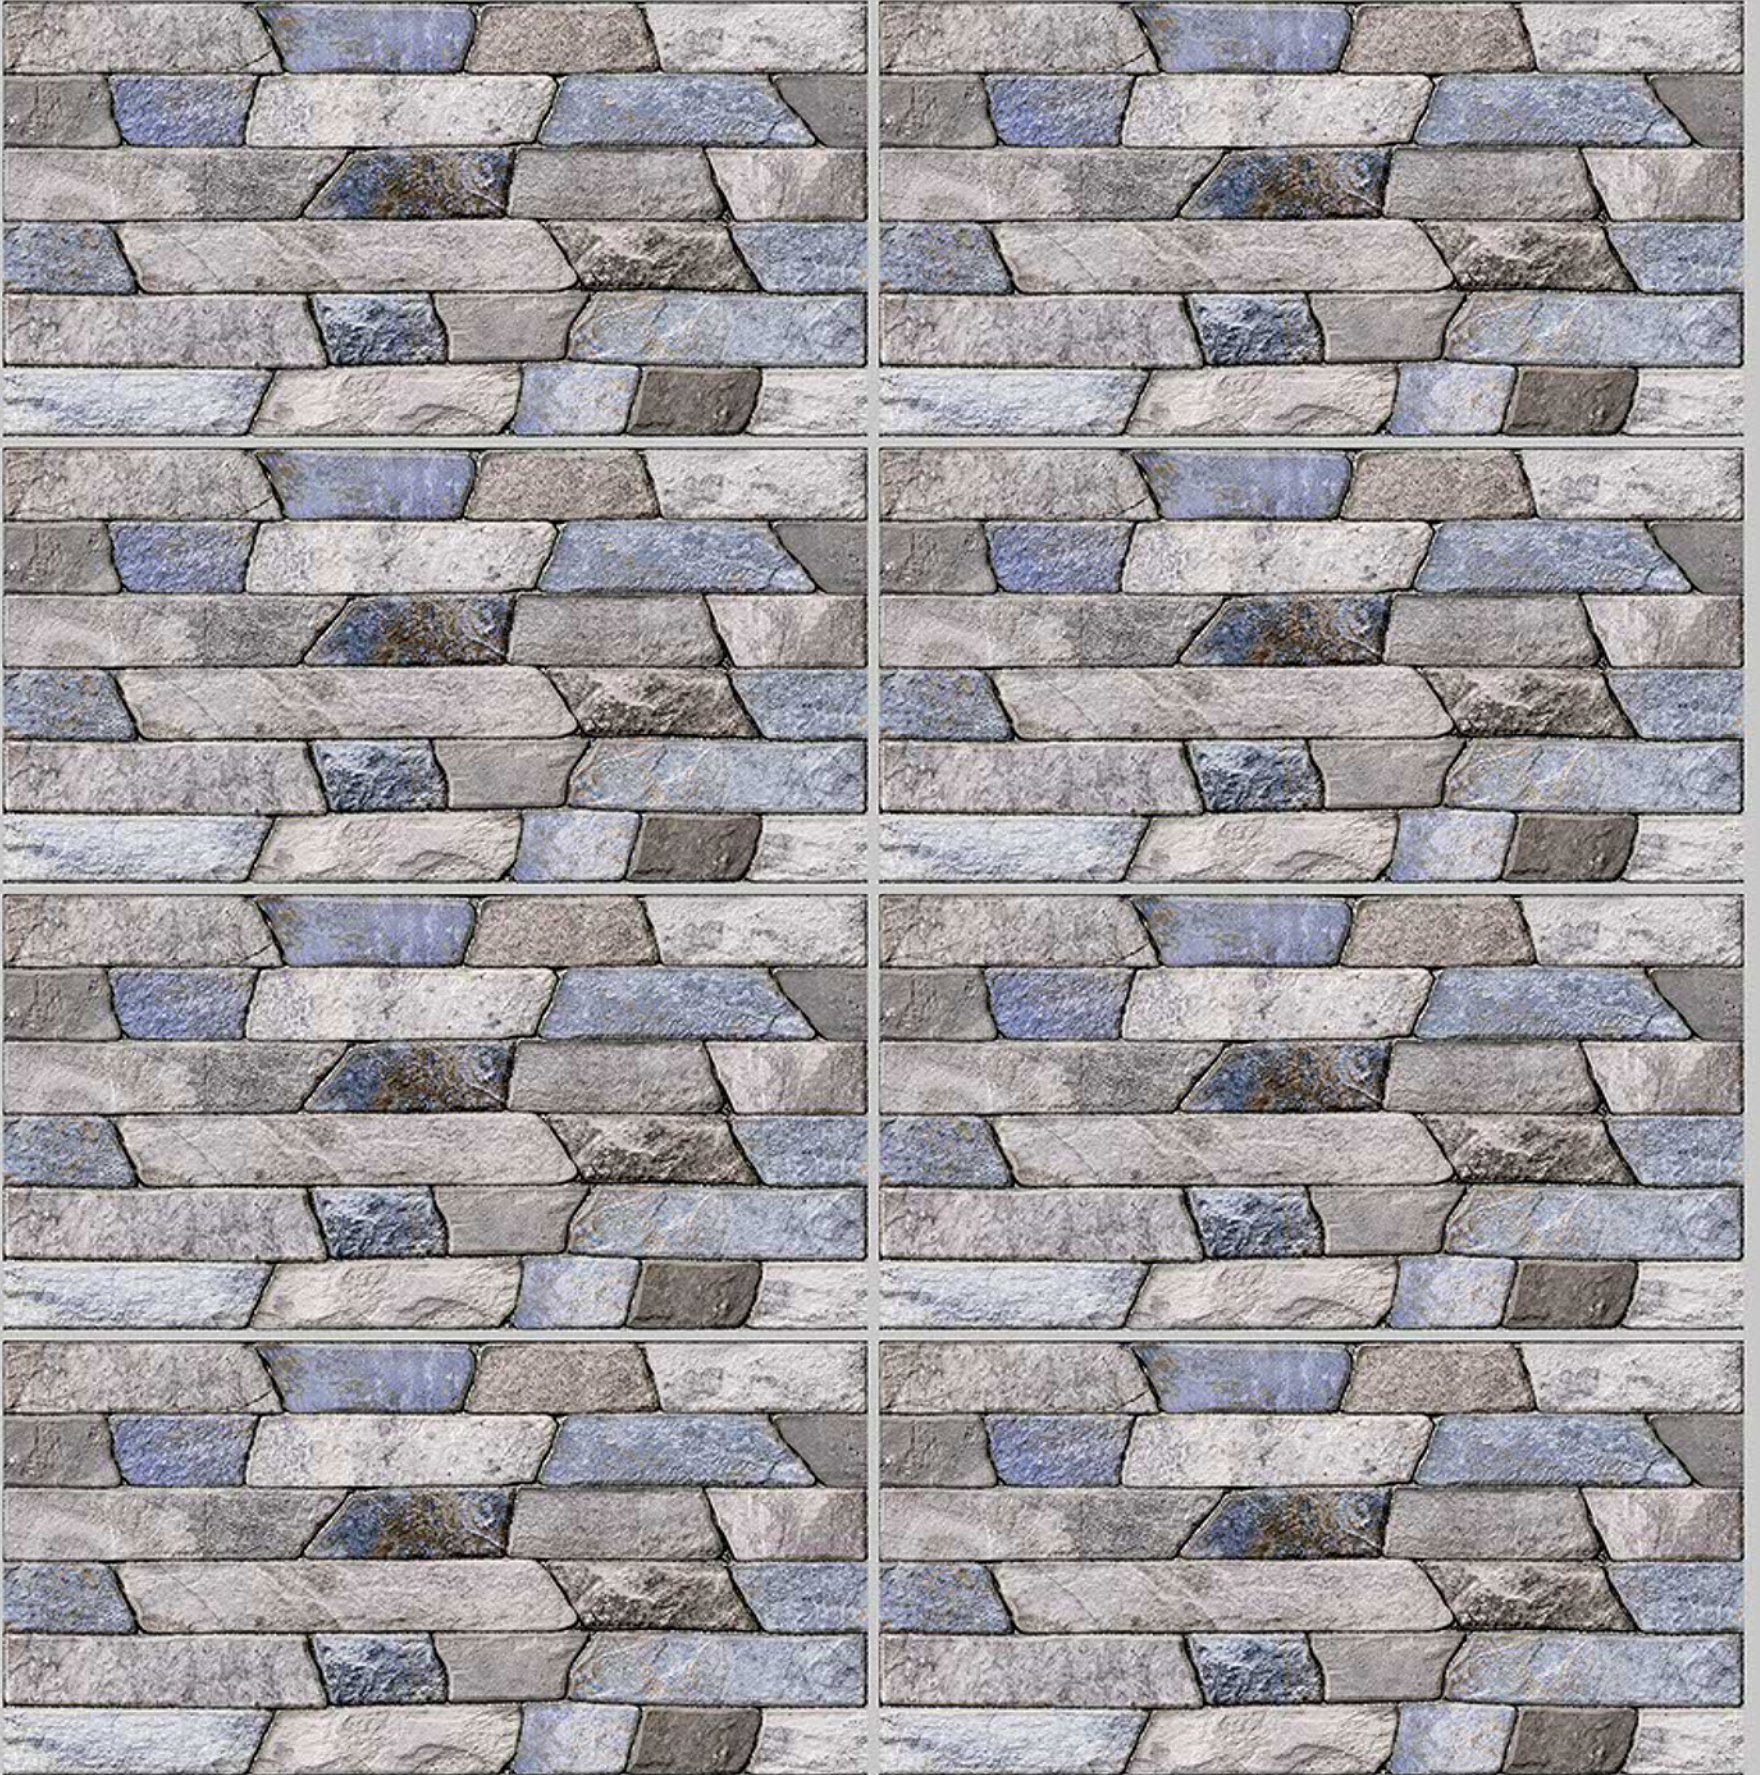

Tile Shown
ELE-10010



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION



ELE-10013



ELE-10014



ELE-10015

DIGITAL 300X
WALL TILES 600mm



Tile Shown
ELE-10013



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION



ELE-10016



ELE-10017



ELE-10018

DIGITAL 300X
WALL TILES 600mm



Tile Shown
ELE-10018



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION



ELE-10019




ELE-10020



ELE-10021

DIGITAL 300X
WALL TILES 600mm

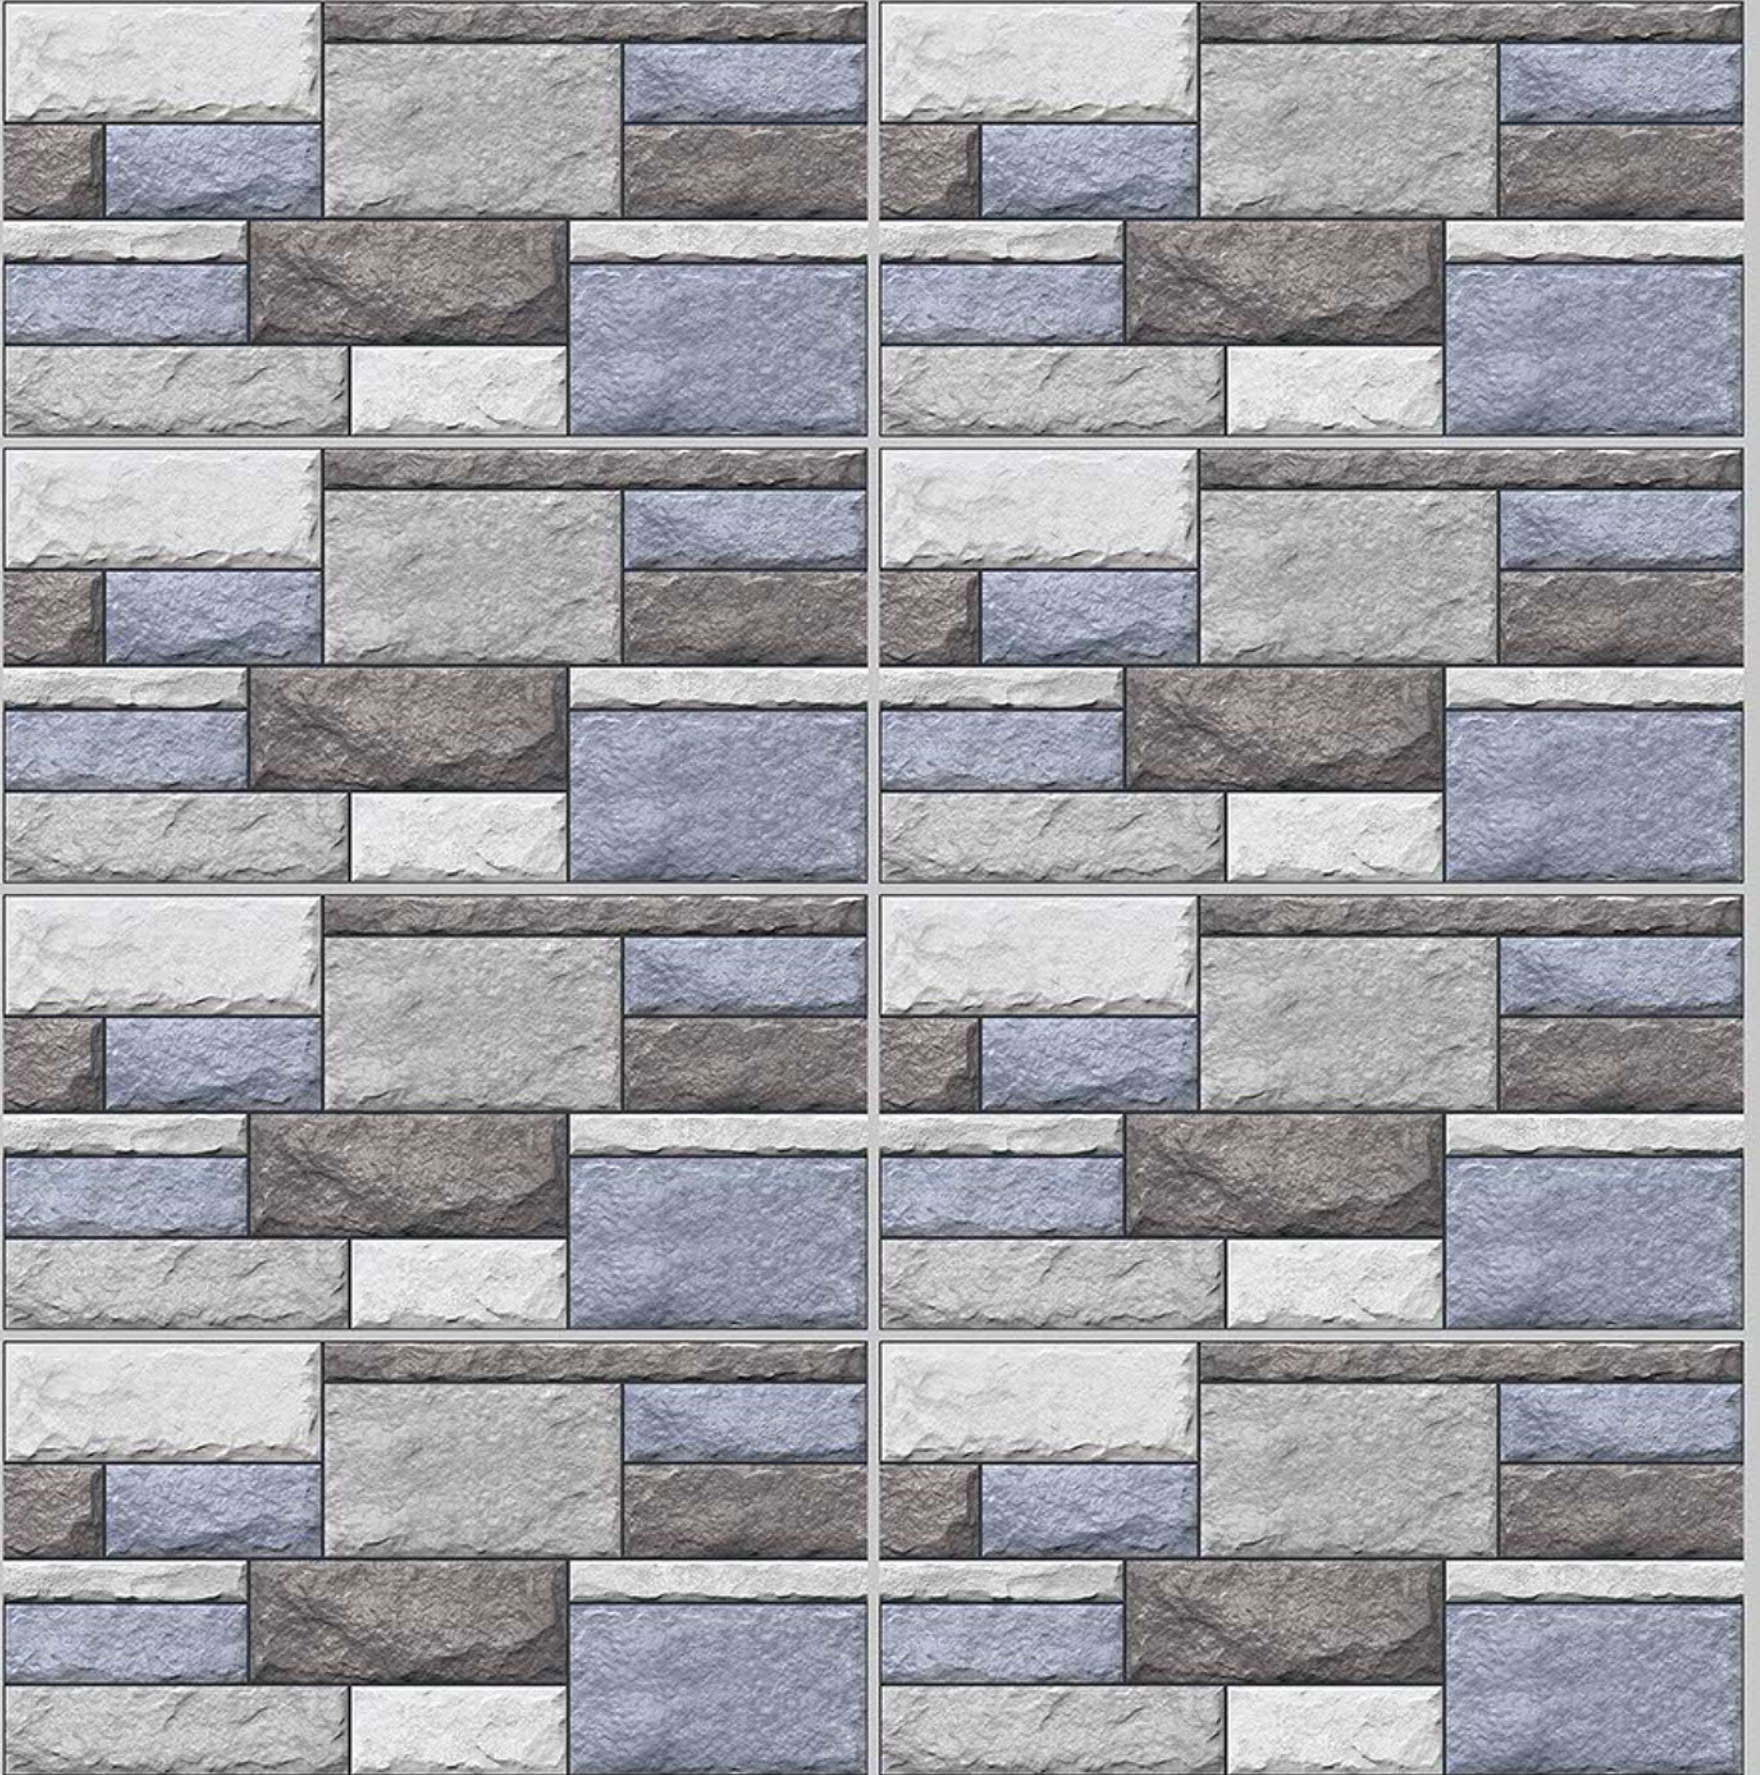

Tile Shown
ELE-10020



resistant to salts | eco sustainable | fire proof | frost proof | random desing




SERIES: ELEVATION



ELE-10022



ELE-10023

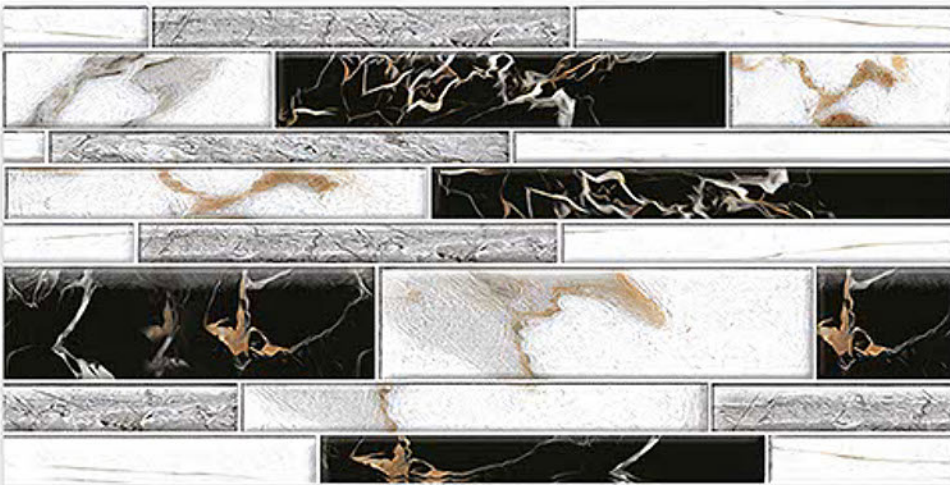

ELE-10024

DIGITAL 300X
WALL TILES 600mm



Tile Shown
ELE-10024



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION



ELE-10025




ELE-10026



ELE-10027

DIGITAL 300X
WALL TILES 600mm

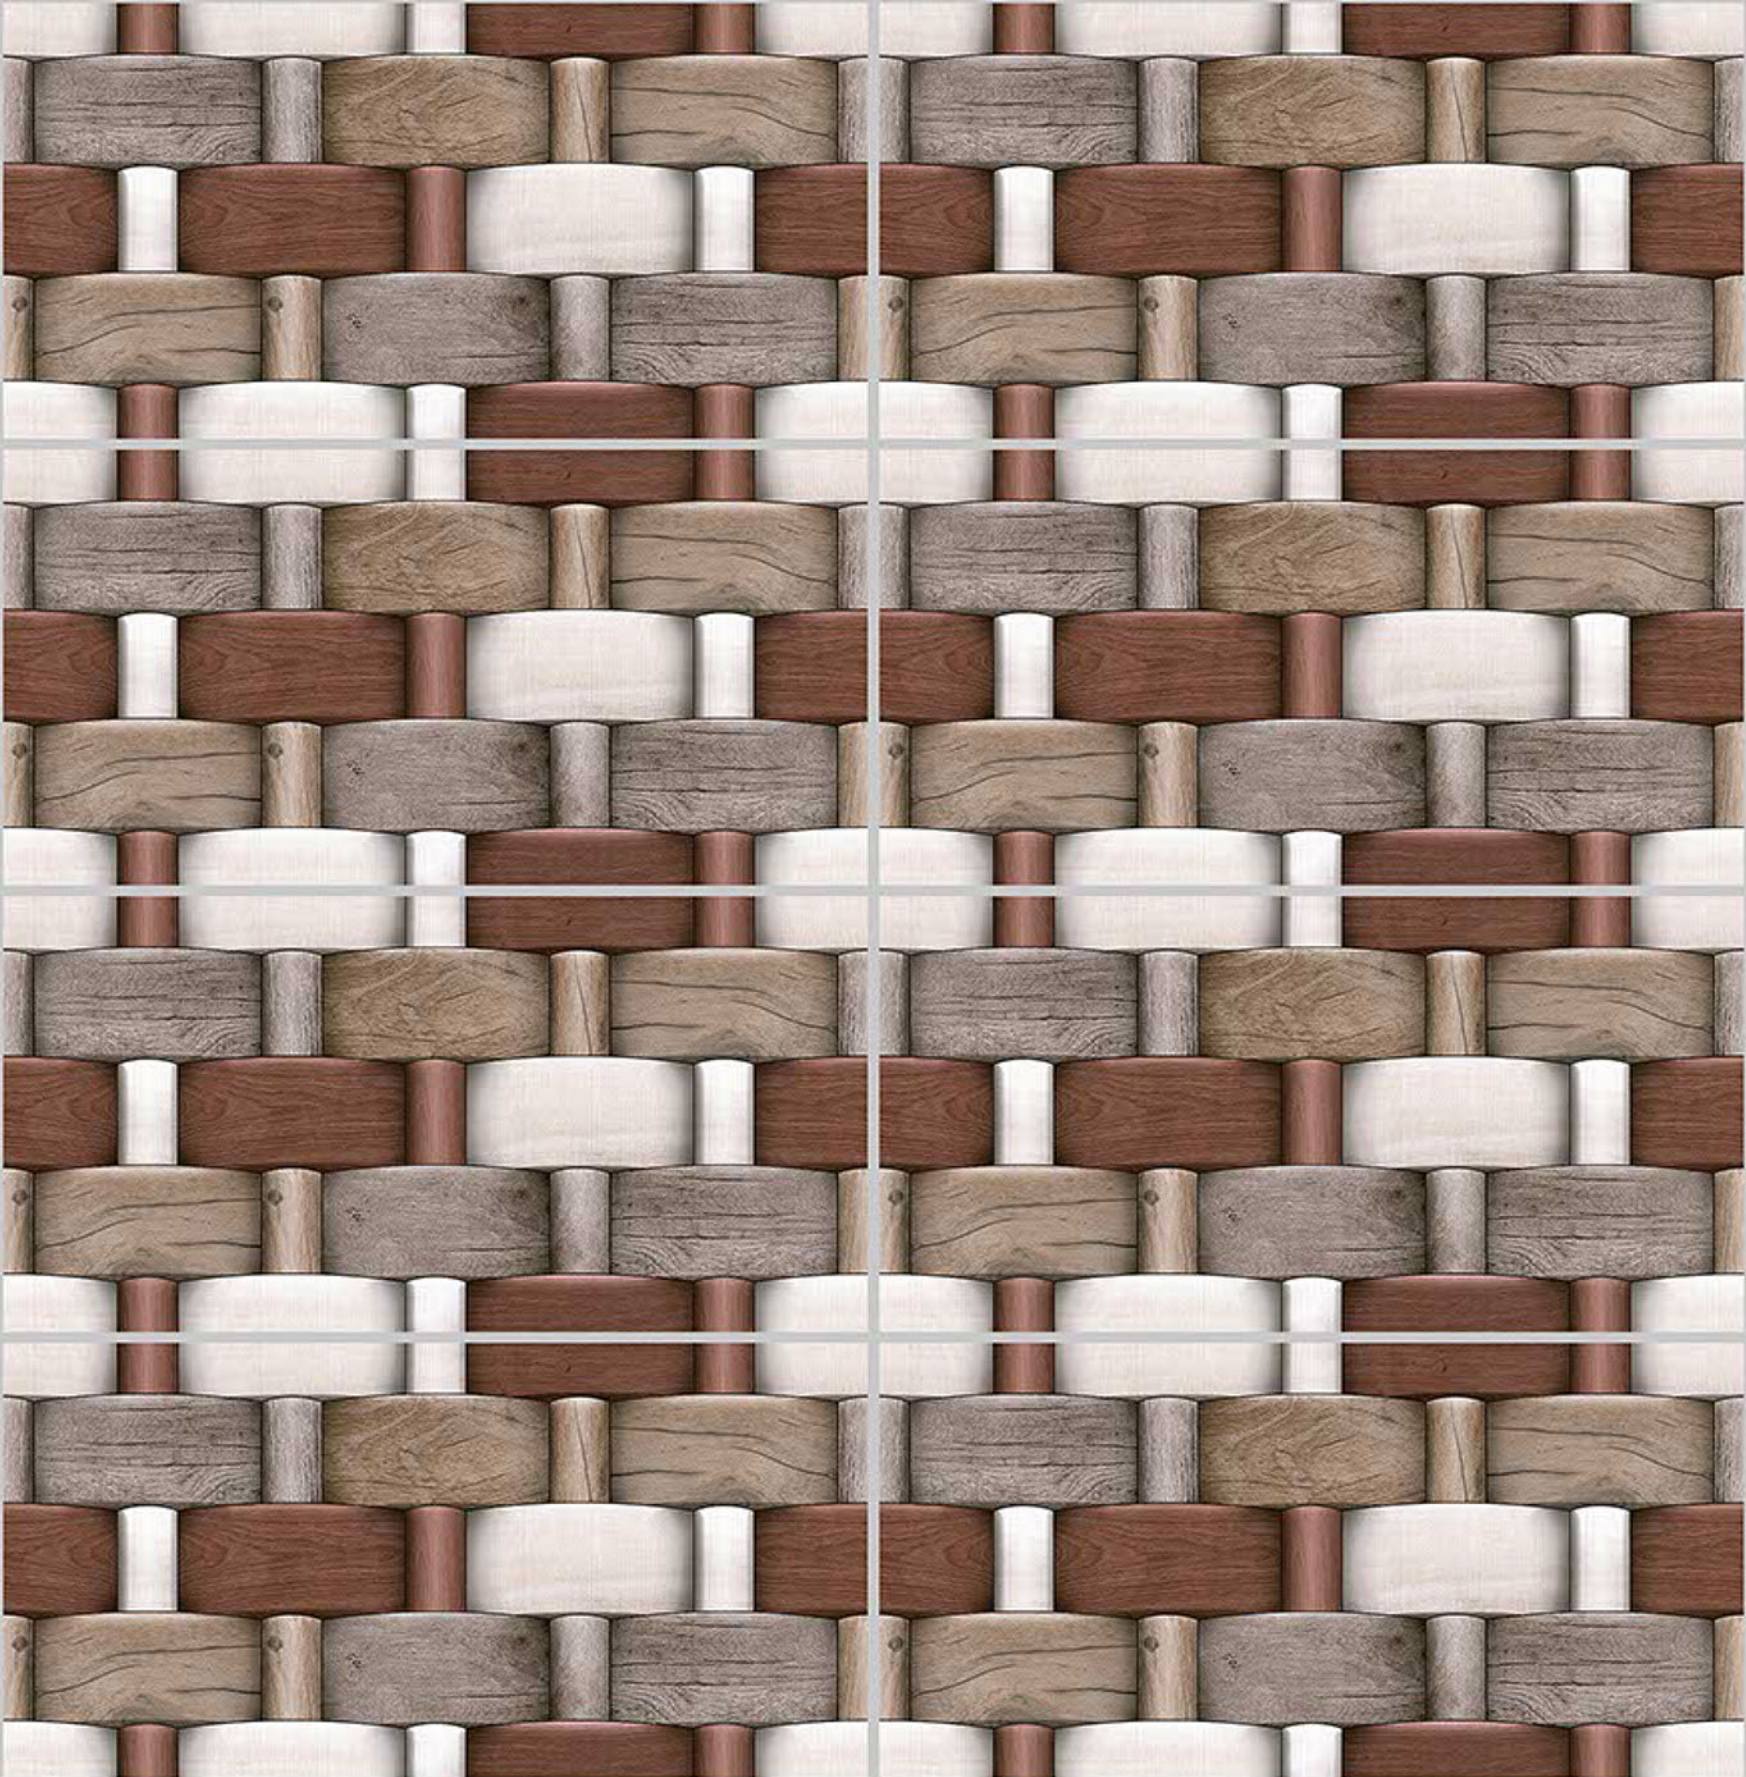

Tile Shown
ELE-10025



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION



ELE-10028




ELE-10029



ELE-10030

DIGITAL 300X
WALL TILES 600mm

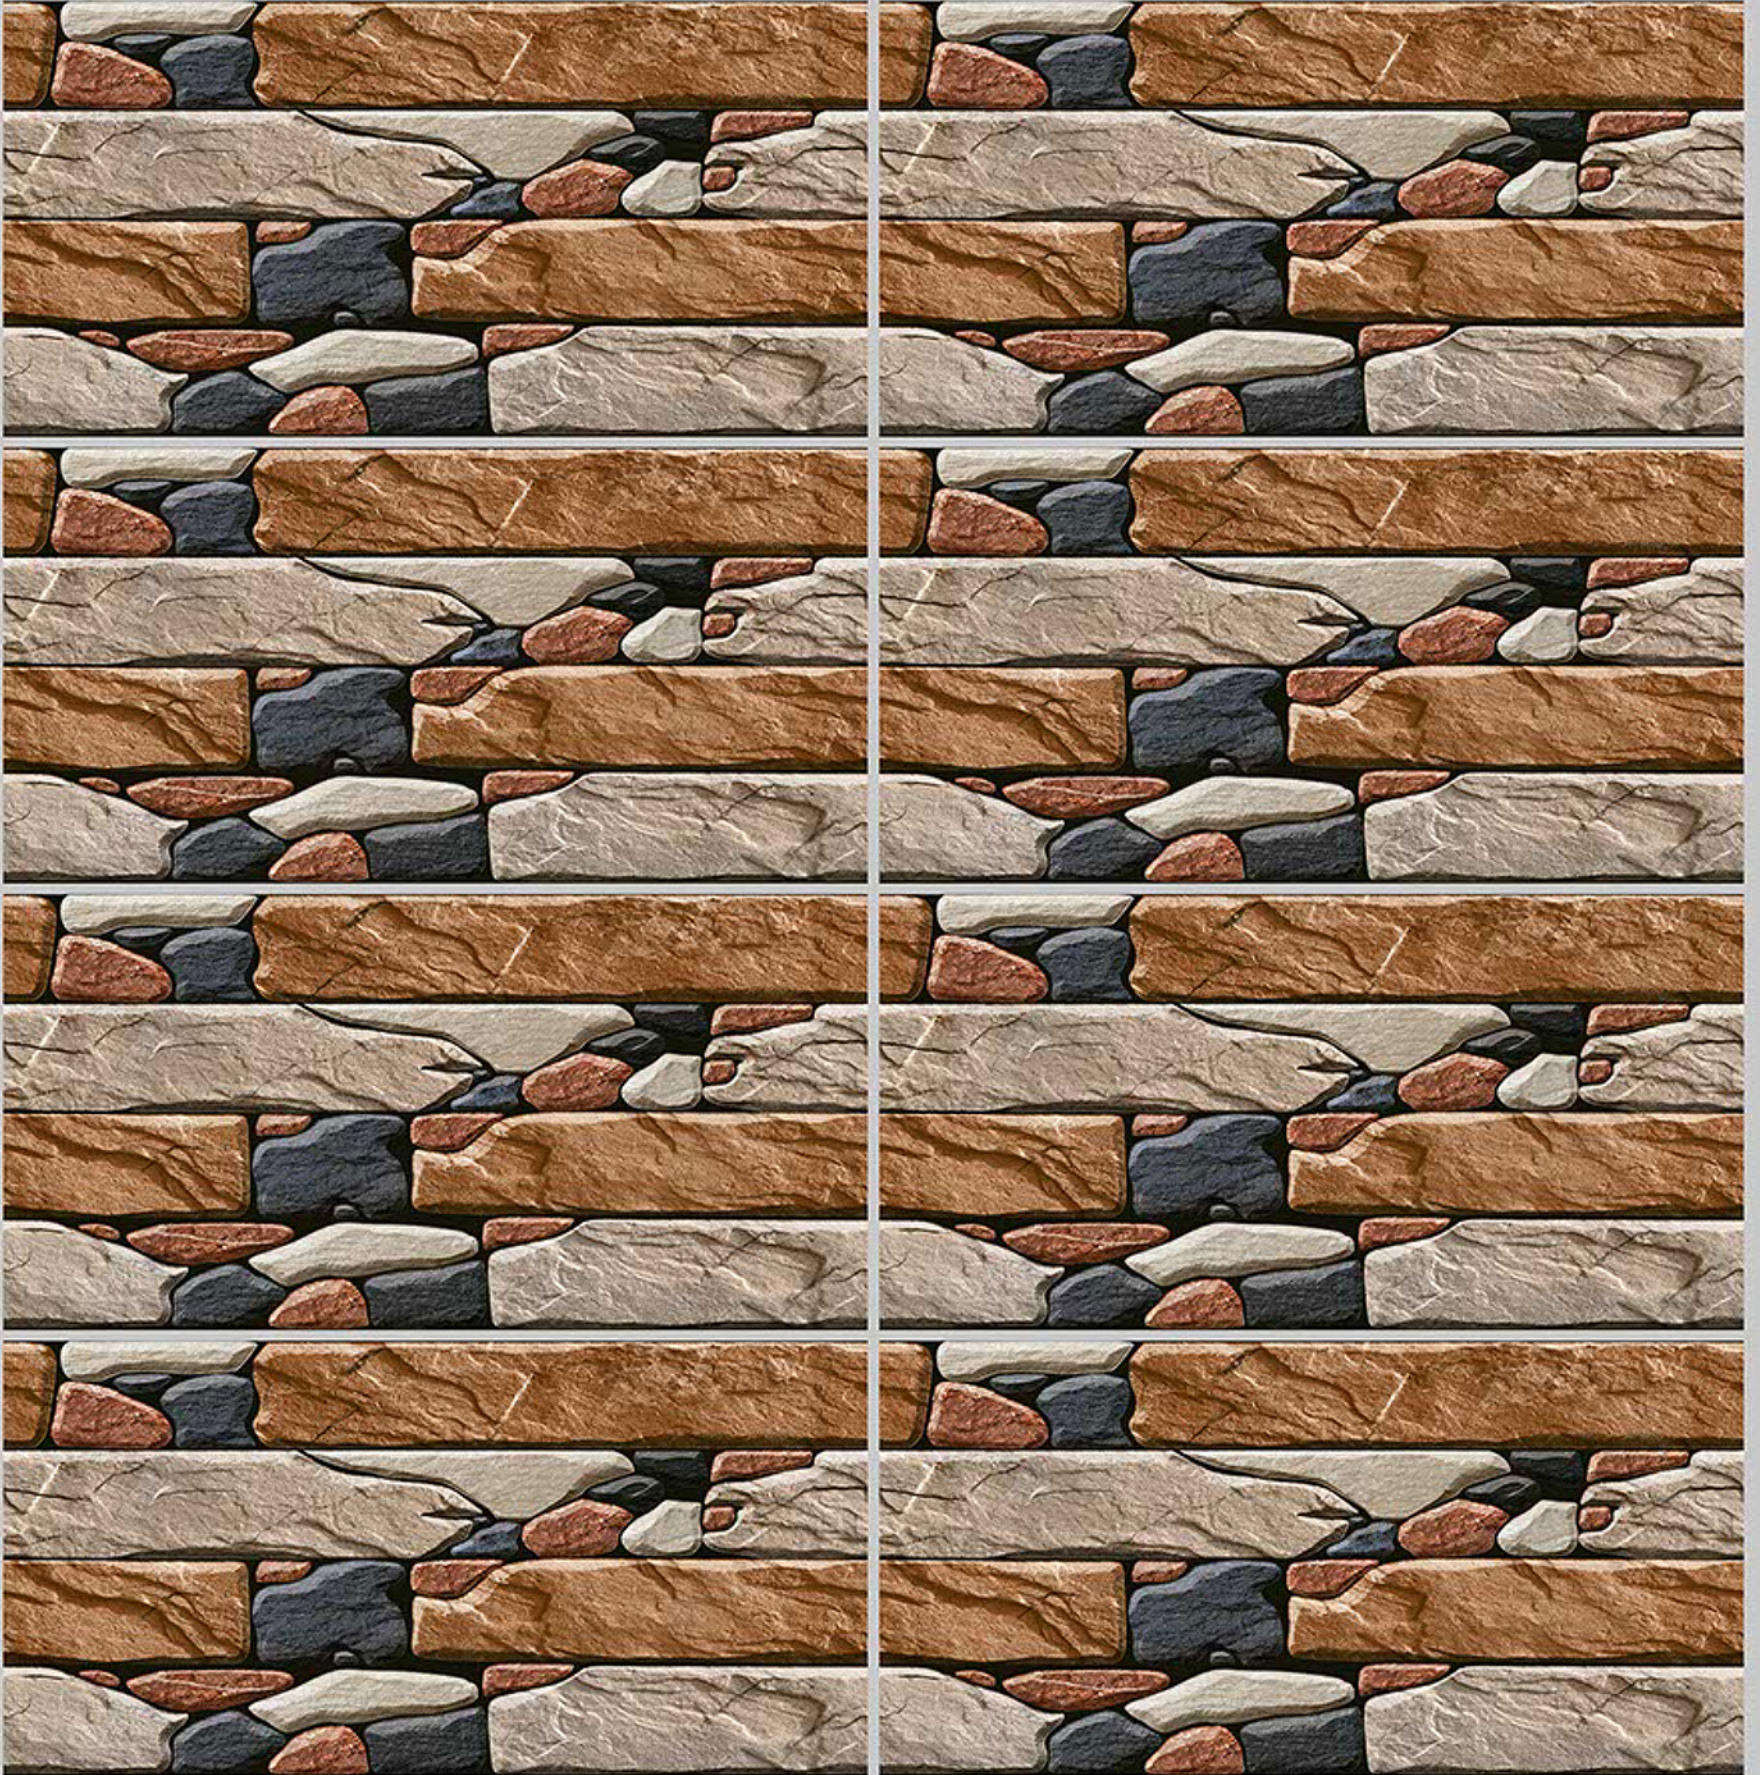

Tile Shown
ELE-10028




resistant to salts | eco sustainable | fire proof | frost proof | random desing




SERIES: ELEVATION



ELE-10031

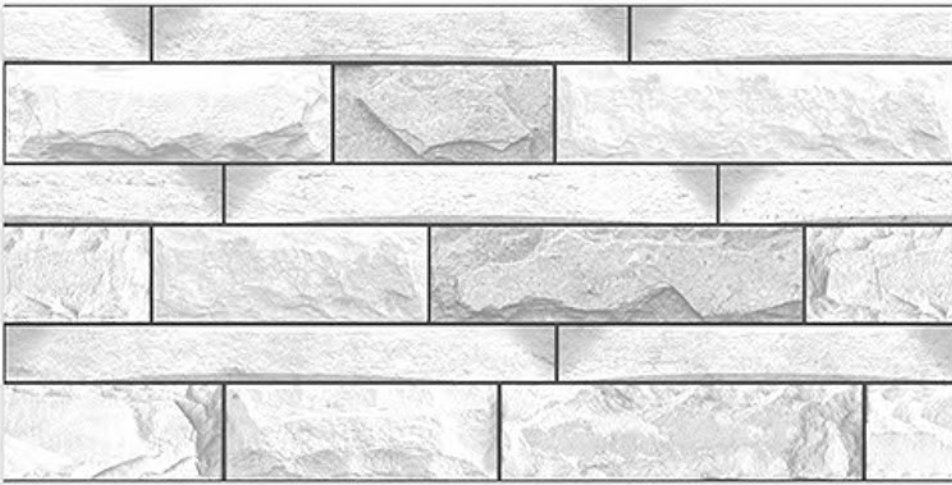


ELE-10032

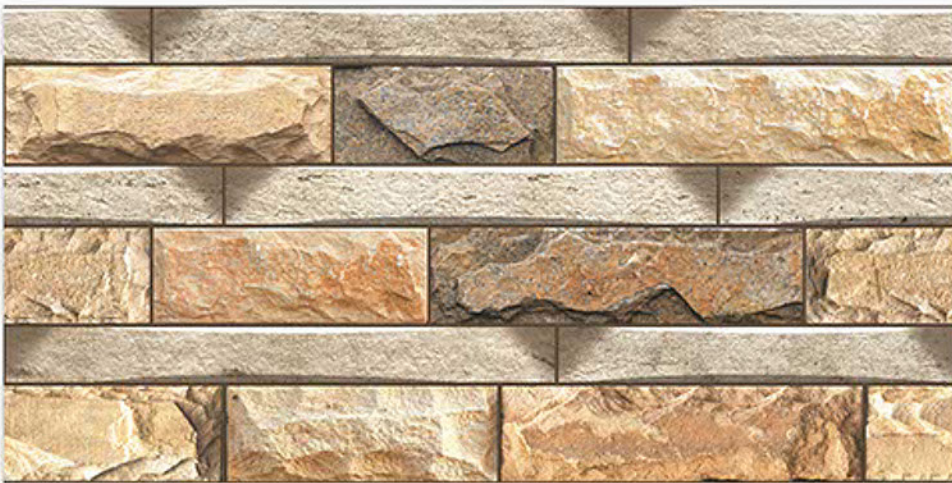

ELE-10033

DIGITAL 300X
WALL TILES 600mm

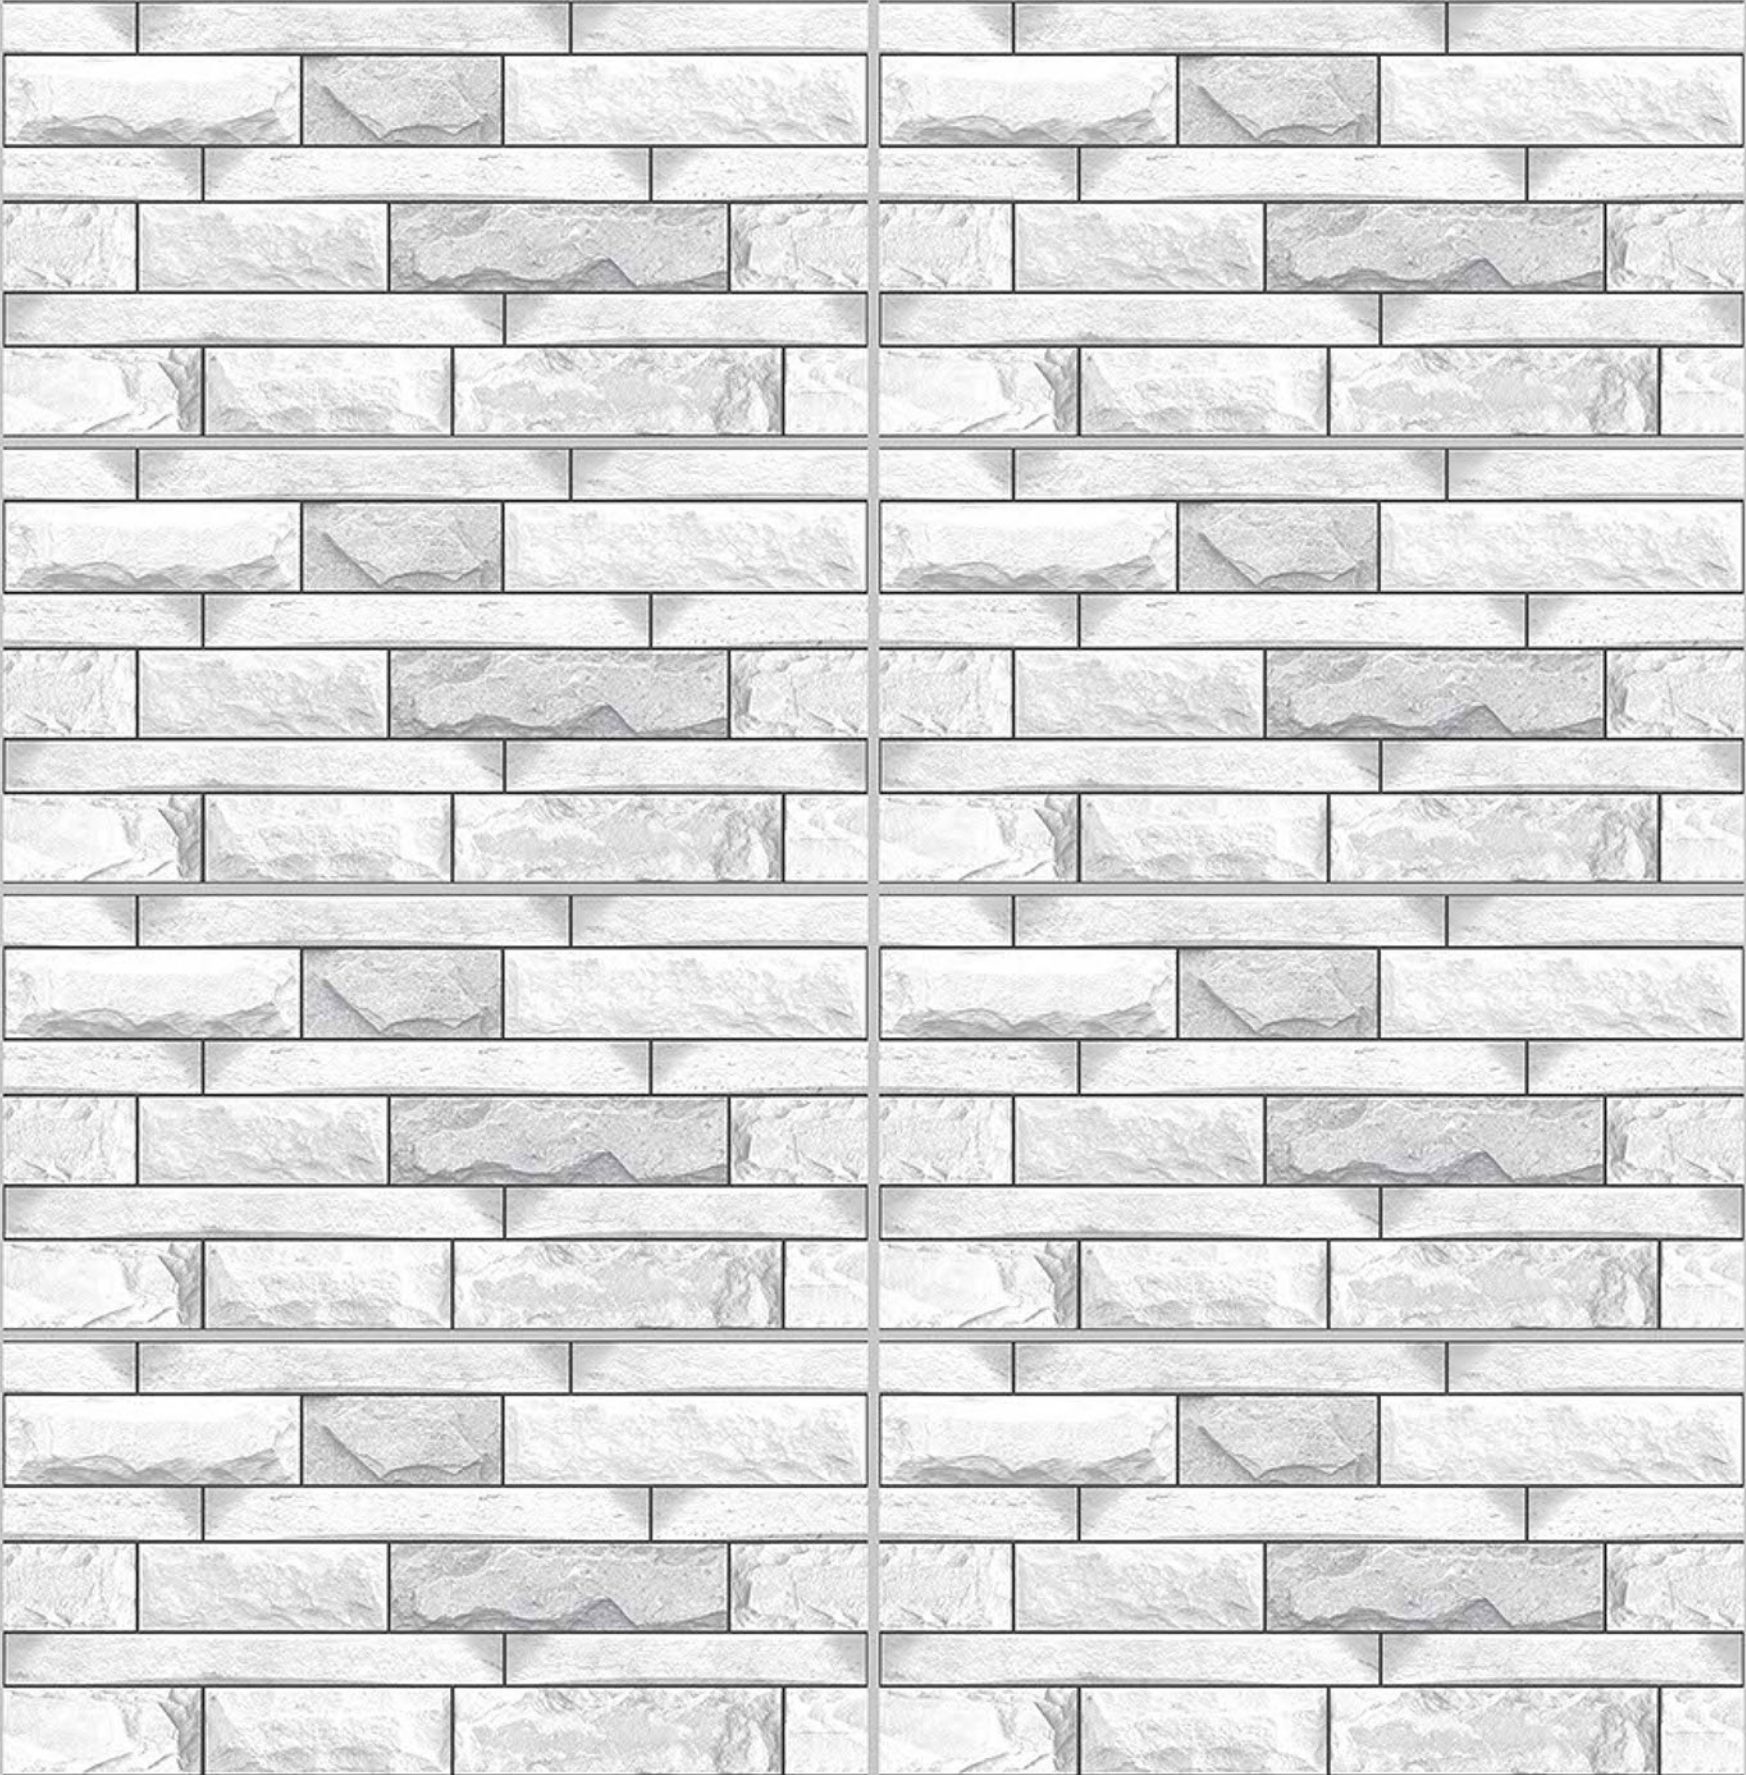

Tile Shown
ELE-10032



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION



ELE-10034




ELE-10035



ELE-10036

DIGITAL 300X
WALL TILES 600mm

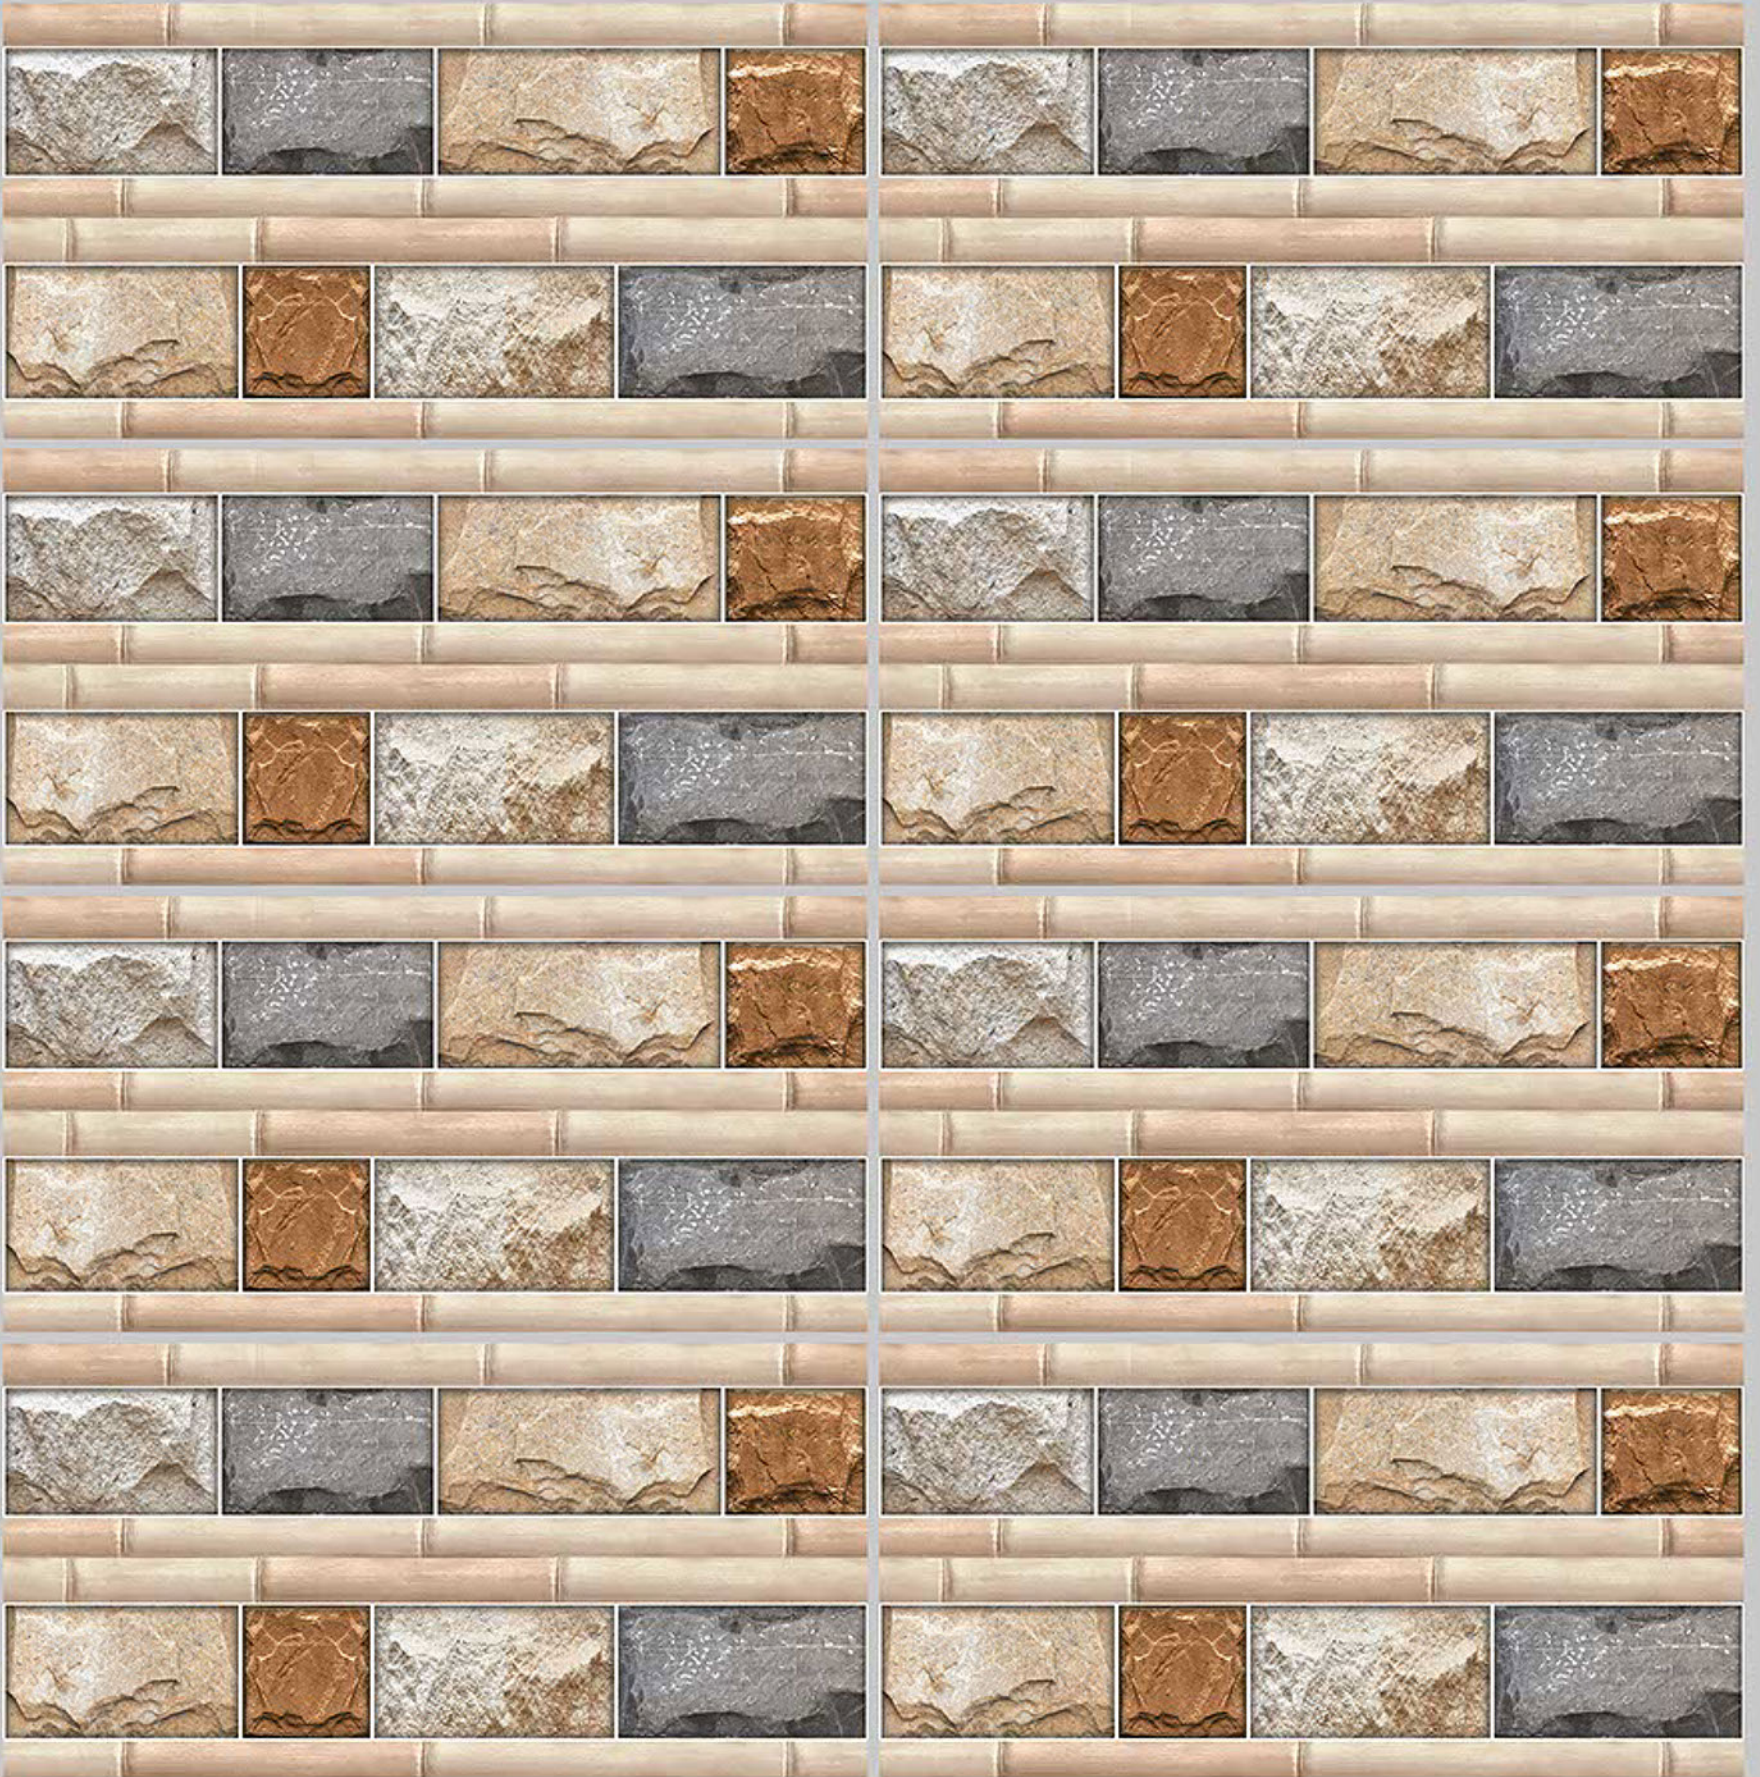

Tile Shown
ELE-10034



resistant to salts | eco sustainable | fire proof | frost proof | random desing



SERIES: ELEVATION




ELE-10037



ELE-10038

DIGITAL 300X
WALL TILES 600mm

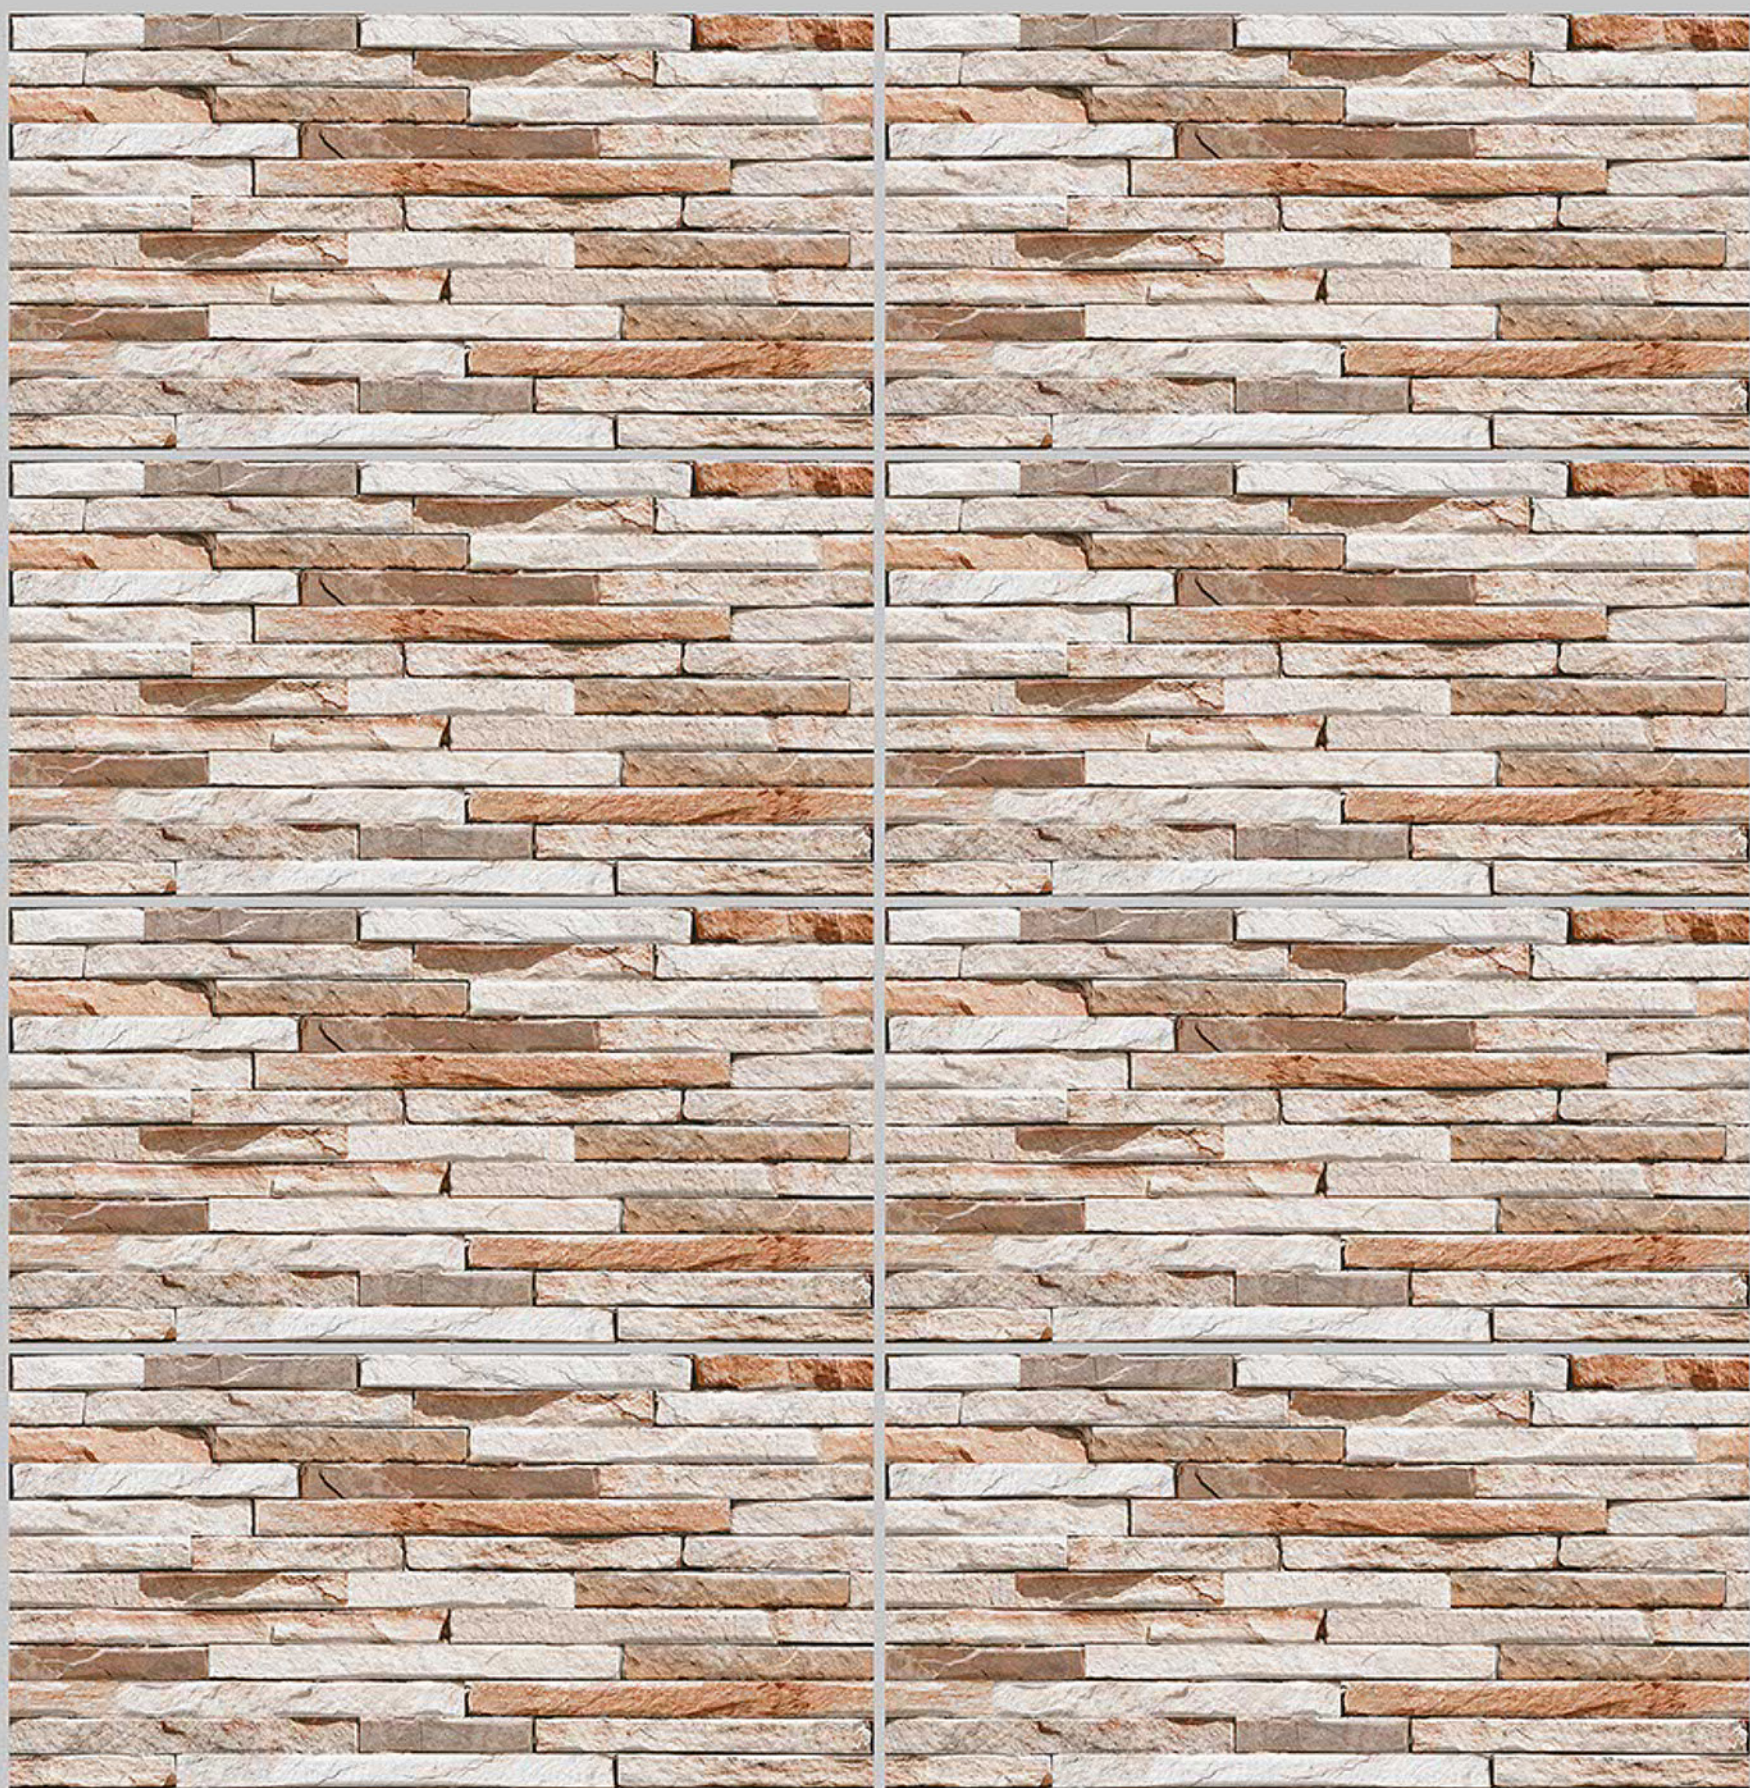

Tile Shown
ELE-10037



TECHNICAL SPECIFICATION


Characteristics	Euro Standards EN-159/IS 13753	Value
DIMENSION & SURFACE QUALITY		
1) Dimension	± 0.5%	± 0.2%
2) Deviation in Thickness	± 0.6mm	± 0.2mm
3) Straightness of sides	± 0.3%	± 0.2%
4) rectangularity	± 0.5%	± 0.3%
5) Surface Flatness	± 0.5%	± 0.3%
6) Surface Quality	Min 95%	Min 96%
PHYSICAL PROPERTIES		
1) Water Absorption	>10%	14-17%
2) Bending Strength	>150 kg/Cm2	200 - 250 Kg/Cm2
3) Scratch hardness(Mohs)	Min 3	Min 3
4) Crazing	1 Cycle	No Crazing at 5 Cycle
CHEMICAL PROPERTIES		
1) Staining Resistance	Min Class 2	Resistance to all Acids And Alkalies & Household Chemical, except Hydro Flouric Acid
2) Household Chemical	Min Class B	
THERMAL PROPERTIES		
1) Thermal Shock	Resistant to 10 Cycle	CONFORMS
2) Thermal Expansion	Max-9E-06	CONFORMS

PACKING DETAIL

Size	Thickness (Approx.)	Tiles Per Box	Coverage Area Per Box	Wt. of Box (Approx.)
300x450 mm	8.5 mm	6 pcs	8.71 sq feet	11 kg.
300x300 mm	8.5 mm	8 pcs	9.69 sq feet	10 kg.
300x600 mm	9 mm	5 pcs	7.74 sq feet	14 kg.

Applications



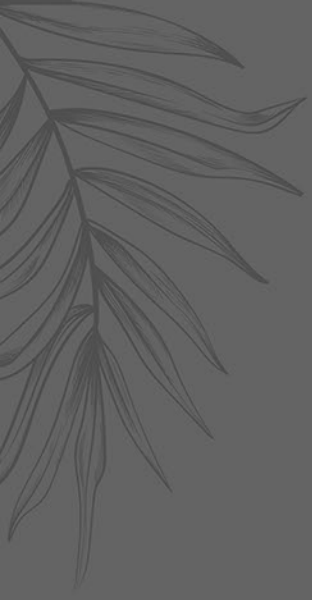

TOPLEX
— GROUP OF COMPANY —

 +91 70168 69573

 Toplexgroupofcompany@gmail.com

